#### **ROOFING:**

WESTLAKE ROYAL ROOFING SOLUTIONS PINE-CREST SHAKE



COUNTRY BLEND

EXTERIOR CEILING SOFFITS: WESTERN STATES METAL T-GROOVE METAL SOFFIT



**Gun Metal Gray** 

WINDOW TRIM: METAL FLASHING



**Medium Bronze GALLAHER RESIDENCE ENTRY/MUDROOM ADDITION** LOT 44, KIRKWOOD, CA 4/12/2024

#### SIDING MATERIAL

**UPPER LEVEL:** VERTICAL BOARD AND BATT SIDING: WESTERN STATES METAL ULTRA BATTEN 20" WALL PANEL



**Medium Bronze** 

LOWER LEVEL:

**BIOLIME STUCCO** 



LIGHT FIXTURE



EXTERIOR RECESSED



**EXTERIOR WALKING SURFACES** 



Bronze Cedar

DECK: TIMBERTECH ADVANCED PVC DECKING




DARK HICKORY

PEDESTRIAN ACCESS BRIDGE: McNICHOLS BAR GRATING

DOORS: PAINTED, PPG-THUNDERBOLT


Cassel Brown Earth - TR/0260



WINDOW: FIBERGLASS




**EXTERIOR ELEVATION MATERIAL LEGEND** 





#### my**Westlake**Royal Login





# PINE-CREST Shake – Country Blend

SKU: 4DAP93145SF

Engineered to replicate hand-split wood shake with the durability only steel can provide.


**Disclaimer:** The colors shown online and in printed materials may vary from actual available tile colors. Always use actual product samples for your region before making a final color selection.

Samples: Unified Steel product samples can be requested through our <u>Contact</u> <u>Us</u> form



#### **Available Colors**

Stirling Gray Timberwood



Features Availability Specifications Deck Shots

#### **Features**

- Class-4 Hail Impact Resistance
- Hurricane Wind Performance Rated
- Lightweight, perfect for Reroofing
- Transferable 50-Year Limited Warranty
- Class A Fire Rated

Aluminum Corten Corten Components

HOMEOWNERS: 750 sq. ft. minimum to receive a quote or sample.

Metal Deck Metal Carports/RV Shelters

Metal Roofing Manufacturer. No Installation Services Available.

Finishes You've Never Seen Before\*

SEARCH

Q

GET A QUOTE

CONTACT


COLORS

S Y & SPEC DOCUMENT LEARNING COLOR

BUILDER FINDER CENTER VISUALIZER

FINISHES

SAMPLES®

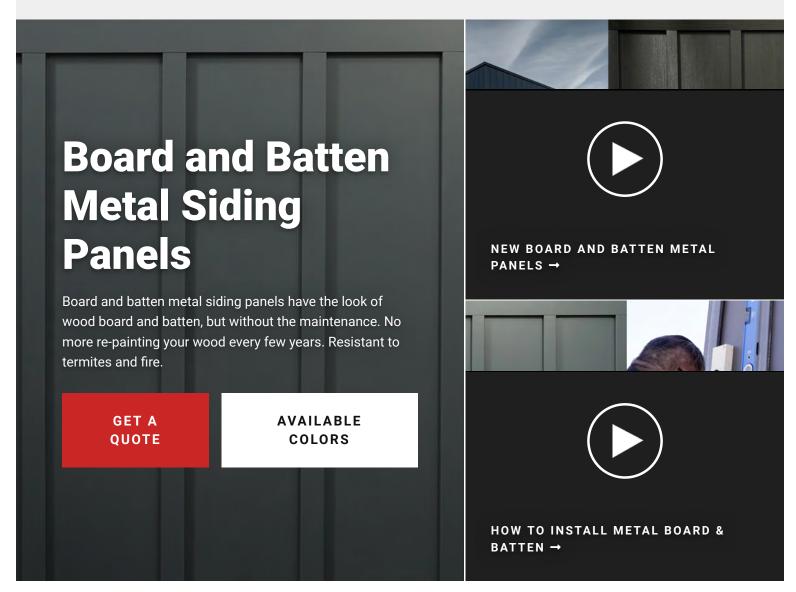

#### **Dimensions**



### VIEW PANEL DIMENSIONS

- BB-10.0 = 10" Coverage
- BB-12.0 = 12" Coverage
- BB-14.0 = 14" Coverage
- BB-16.0 = 16" Coverage
- BB-18.0 = 18"
   Coverage
- BB-20.0 = 20" Coverage

BB-12.0 & BB-20.0 will be the most cost effective panel widths.

#### **Product Data**

Material Type: Board And Batten Metal Siding

#### **Available Gauges:**

- 24 Gauge Steel
- 26 Gauge Steel
- .032 Aluminum

#### Panel Width:

- Standard: 10", 12", 14", 16", 18, 20" Coverage
- Special Order: 10" 25" Coverage

Panel Height: 3/4"

Batten Width: 2"

Panel Length: 30'
Maximum

#### Substrate:

- AZ 50 (Aka Galvalume/Zincalume)
- Aluminum

#### Finishes:

- PVDF Resin Based (24 GA Steel)
- PVDF Resin Based (.032 Aluminum)
- SMP Paint Finish (24 & 26 GA)

#### **Fasteners:**

Concealed

#### Installation:

Horizontal or Vertical Installation

# Product Documents

- Board & Batten
  Catalog
- Trim And Flashings
- CAD Details
- Care & Maintenance
- Field Cutting & Touch
  Up Paint
- Installation Guide
- Paint Warranties
- Product Data Sheets
- Product
  Specifications
  (Available Online
  Soon)
- Solar Reflectivity
  Index



### WESTERN STATES METAL ROOFING

(877) 787-5467

# **STANDARD** COL

Colors represented on this chart may not exactly match actual material. All colors should be verified using actual metal samples.

### STANDARD COLORS:





 $^\dagger$ This material is batch sensitive and directional. Do not mix batches or coil lots. Premium Colors. Slightly higher prices.
















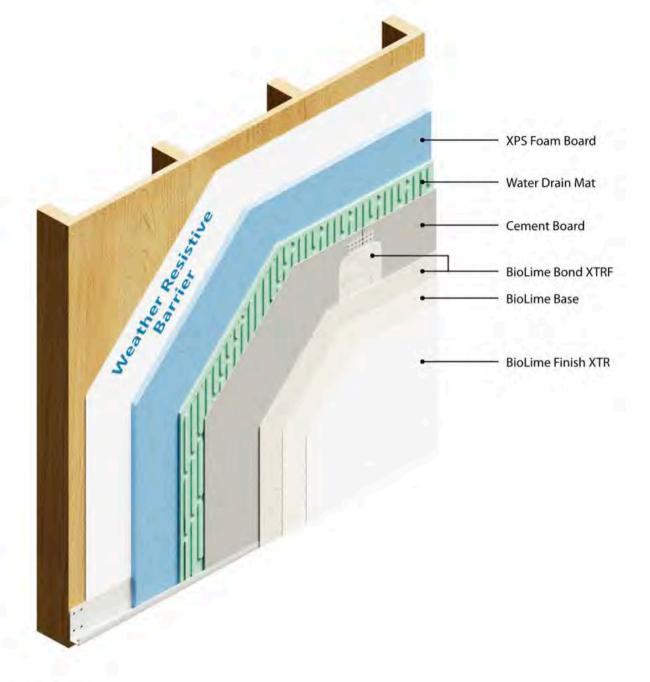



# **WOOD FRAME WALL**

BioLime is a light-density, three layered lime plaster / stucco coating system that does not crack and permeates heat and moisture from frame wall systems to ensure long-term, sustainable objectives.

System Calculator displays results as a 3/4" overall finish:

Bond XTRF: 1/4" applied

Base: 3/8" applied

Finish XTR: 1/8" applied

# EVERLASTING, NATURAL COLOR PIGMENTS











# **BIOLIME PIGMENTS**

**Earth pigments** are naturally occurring minerals containing natural iron oxides and manganese oxides that have been used since prehistoric times.


Cave paintings dating back as far as 30,000 years are evidence of some of the first uses of earth pigments as an art form. The pigment was applied by hand or even blown through a hollow reed in a primitive airbrush type of technique on moistened limestone cave walls that bled the limestone during the process. This natural chemical reaction created the later Roman technique known as "fresco". This ancient art form created durable, weather proof artworks that are forever dated in history.


We use the exact chemistry to create the colors of all of our finishing products.


In similar fashion to ancient cave paintings artworks, BioLime colorants are unaffected by UV light and will not chip, peel or crack.

Achieve Everlasting, Natural Beauty with BioLime.









Metal Coil/Flats: Same Day Pick Up In Arizona SEE DETAILS X Aluminum Corten **Corten Components HOMEOWNERS:** 750 sq. ft. minimum to receive a quote or sample. **Metal Carports/RV Shelters Metal Deck** SEARCH **GET A QUOTE** Q

STERN STATES METAL ROOFING Finishes You've Never Seen Before

CONTACT

**COLORS** 

s v

SPEC **BUILDER**  **DOCUMENT FINDER** 

LEARNING CENTER

COLOR **VISUALIZER** 

3 D TEXTURES/E-**SAMPLES**®

**FINISHES** 

T-Groove-NR: **Interior & Exterior Metal Wall Panels** T-GROOVE PROS & CONS → T-Groove®-NR is an interior metal wall panel or an exterior metal wall panel. It can also be used for ceilings, fascia, and soffits. There is no reveal between the panel side lap. INTERACTIVE COLOR **GET A** QUOTE **CHART HOW TO INSTALL T-GROOVE® METAL** SIDING PANELS →

#### **Dimensions**



DOWNLOAD CHART

#### **Material Type:**

T-Groove® - NR Metal Fascia, Soffit, And Wall Panel

Available Gauges: 22,24

Fastening Type: Concealed

Overall Coverage: 12"-20"

#### **Product Data**

**Standard Face Sizes:** 12", 14", 16", 18", 20"

**Custom Face Sizes:** 13", 15", 17", 19"

Panel Length: 1' to 45' max

Reveal: None

Rib Height: 1"

**Substrate:** AZ50 Minimum

(AKA

Galvalume®/Zincalume®)

**Stiffening Ribs or Pencil** 

Ribs: Available Upon

Request

Single or Double Vent

Strips: Available Upon

Request

**Installation:** Installation Over A Solid Substrate (Vertical or Horizontal)

**Applications:** Residential, Commercial, Agricultural,

Interior

# Product Documents

- Trim And Flashings
- Installation Guide
- Panel Sizes/Line
  Drawings
- ♣ CAD Details
- Care & Maintenance
- Field Cutting & Touch
  Up Paint
- Paint Warranties
- Product Data Sheets
- Product
  Specifications
- Solar Reflectivity
  Index
- Stiffening Ribs & Vent Strips

**AVAILABILITY CHART** 

# T-Groove - No Reveal Availability & Dimensions



### WESTERN STATES METAL ROOFING

(877) 787-5467

# **STANDARD** COL

Colors represented on this chart may not exactly match actual material. All colors should be verified using actual metal samples.

### STANDARD COLORS:





 $^\dagger$ This material is batch sensitive and directional. Do not mix batches or coil lots. Premium Colors. Slightly higher prices.















# Smooth-Pro™ Fiberglass Exterior Door: Top View Sunburst 5-Light 4-Panel

JELD WEN.

WINDOWS

DOORS

https://www.jeld-wen.com/ STYLE & [ where-to-buy?pid=147201

OR PROS

SEARCH O



### Model Overview

PROJECT TYPE

New construction and replacement

COLORS & FINISHES

1 Finish Option 34 Paint Options

11 Stain Options

CONSTRUCTION

ADA Requirements Impact Resistant Doors

Smooth-Pro Construction

MAINTENANCE LEVEL

Minimal

GLASS

PANEL OPTIONS

Panel options

Energy efficient, tinted and privacy.

WARRANTY

Lifetime Warranty

DIVIDED LITES

Grilles between the glass.

Colors & Finishes

Glass

Divided Lites

Panels

Construction & Framing


Energy & Sustainability

Colors & Finishes

FINISH OPTIONS

Note: Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.







DOORS

STYLE & DESIGN

SUPPORT FOR PROS



## Model Overview

#### PROJECT TYPE

New construction and replacement

#### MAINTENANCE LEVEL

Minimal

#### WARRANTY

Lifetime Warranty

#### COLORS & FINISHES

1 Finish Option 34 Paint Options 11 Stain Options

#### CONSTRUCTION

ADA Requirements Fire Rated Smooth-Pro Construction

#### PANEL OPTIONS

Panel options

### Colors & Finishes

#### FINISH OPTIONS

Note: Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.







# C650 Ultra™ Series

Fiberglass Windows | \$\$\$\$ | \*\*\*\* 3.6 (391)

Exceptionally strong and low-maintenance, the C650 Ultra™ Series windows are made from fiberglass, one of the most durable materials on the window-and-door market. They're ideal for any style and climate.

Request a Brochure


**EXTERIOR COLORS** 



INTERIOR COLORS



To match Existing window color

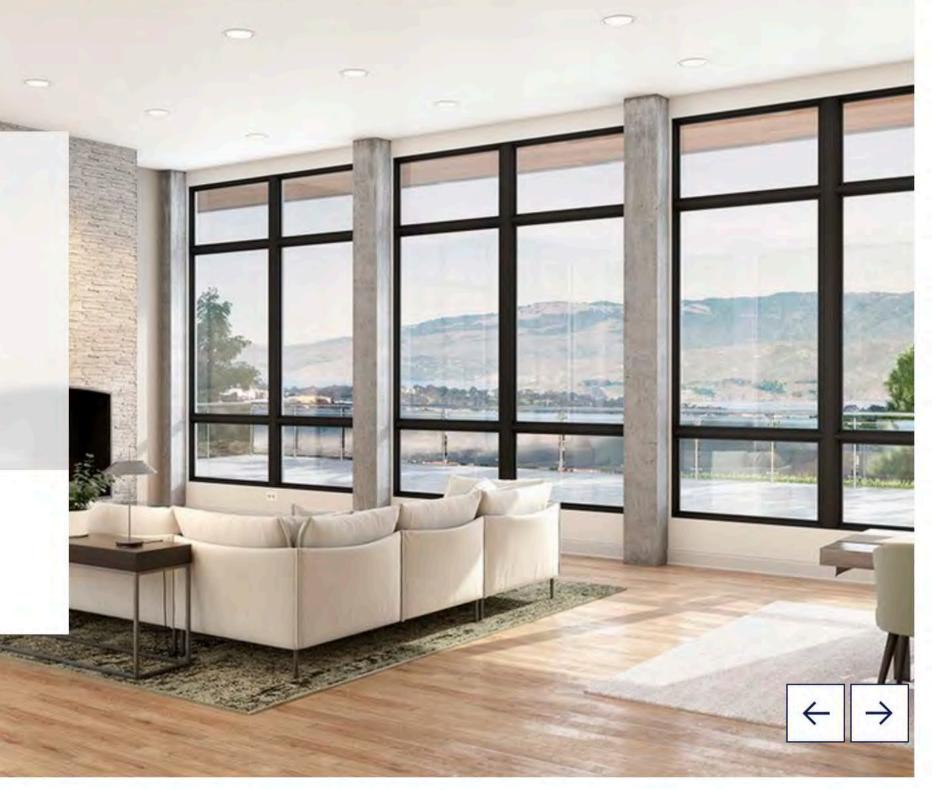


# **Galvanized Steel Grip Edge Flashing - Primed**





**Medium Bronze** 





### McNICHOLS® Bar Grating

Standard-Duty Welded, Rectangular Bar, CMW-4-150 - CLOSE MESH, ADA, 11-W-4 Spacing, Carbon Steel, Hot Rolled, 1-1/2" x 3/16" Rectangular Bar, Smooth Surface, 70% Open Area, 24" x 288"


McNICHOLS® Bar Grating, Standard-Duty Welded, Rectangular Bar, CMW-4-150 - CLOSE MESH, ADA Compliant, 11-W-4 Spacing, Carbon Steel, Hot Rolled, Mill Finish, 1-1/2" Height x 3/16" Thick Rectangular Bearing Bars, Spaced 11/16" on Center with 1/2" Clear Space Between Bearing Bars, Smooth Surface, (ADA Compliant Product When Direction of Bearing Bars (Span) Installed Perpendicular to Dominant Direction of Travel), Bearing Bars Run Parallel to Length of Panel, Cross Bars Spaced 4" on Center, 70% Open Area

ITEM 6602316124 - 24" x 288"

ITEM SPECIFICATIONS	
Item Number	6602316124
Product Line	Bar Grating
Construction Type	Standard-Duty Welded
Bearing Bar Shape	Rectangular Bar
Series Type & Name	CMW-4-150 - CLOSE MESH (11-W-4) - ADA
Product Spacing	11-W-4
Primary Material	Carbon Steel (CS)
Alloy, Grade or Type	Hot Rolled (HR)
Material Finish	Mill Finish
Bearing Bar Size & Shape	1-1/2" Height x 3/16" Thick Rectangular Bar
Bearing Bar Height	1-1/2"
Bearing Bar Thickness	3/16"
Bearing Bar Spacing	11/16" on Center
Clear Space Between Bearing Bars	1/2"
Bearing Bars Per Foot of Width	17.4545
Product Surface	Smooth
ADA Compliant	ADA Compliant Product When Direction of Bearing Bars (Span) Installed Perpendicular to Dominant Direction of Travel
Bearing Bar Direction (Span)	Parallel to Length of Panel
Cross Bar Size & Shape	1/4" Round Twisted Rod
Cross Bar Spacing	4" on Center



Percent Open Area	70%
Weight	17.00 Lbs./Square Foot
Product Form	Panel
Sizes (Width x Length)	24" x 288";36" x 240" (Cut Sizes Available)



FREE \$0.00

PRODUCTS ~

INSPIRATION ~

WHY TIMBERTECH V

RESOURCES V

GET STARTED ~

Home > Products > Decking > TimberTech Advanced PVC > Vintage Collection®



#### TIMBERTECH ADVANCED PVC

### Vintage Collection®

#### Exotic Hardwoods

Get the sought-after look of premium hardwoods such as ine, mahogany, and teak, without the rigorous maintenance of wood. Our capped polymer decking features proprietary materials technology that delivers sophisticated, real wood aesthetics you'll never have to sand, stain, or seal.















#### DETAILS

**OPTIONS & DIMENSIONS** 

**INSTALLATION & WARRANTY** 

#### FAQS

#### SUPER DURABLE

Made of high-performance and recycled polymers (and absolutely no wood fibers), TimberTech Advanced PVC decking is highly resistant to moisture damage like mold and mildew, and it won't splinter, crack, cup, peel, or rot.

#### **FADE & STAIN RESISTANT**

Enjoy a richly hued deck for decades with protective capping that resists UV rays and staining.

#### **SPLINTER FREE & BAREFOOT FRIENDLY**

Better for bare feet and paws, TimberTech Advanced PVC decking won't splinter, and stays up to 30° cooler to the touch with 40% better traction, wet or dry, than competitive products.

#### SUSTAINABLE

Made in the USA from approximately 60% recycled material, including post-construction scrap like vinyl siding and trim, Timbertech Advanced PVC decking is a sustainable option. Plus, it's fully recyclable at the end of its useful life.

\*Although TimberTech Advanced PVC decking is cooler to the touch than many other deck board products, all decking products will get hot in the sun. Additionally, the darker the decking color, the hotter it will feel. For hotter climates, consider choosing a lighter color.

#### LOW MAINTENANCE

Never sand, stain, or seal your deck ever again. An occasional scrub and rinse are all that's needed.

#### BETTER CHOICE FOR FIRE ZONES

Passes tests for slowing flame spread: Class A Flame Spread Rating & WUI (Wildland Urban Interface) compliant.

#### **INDUSTRY-LEADING WARRANTIES**

Rest easy knowing your investment is protected with a 50-Year Fade & Stain Limited Warranty and Limited Lifetime Product Warranty.

#### **DESIGN VERSATILITY**

With multiwidth decking and heat-bending capabilities, TimberTech Advanced PVC Decking allows you to create a truly unique design that shows off your sense of style.

Ceiling Wall Recessed Tape Track Under Cabinet Outdoor Landscape Linear Limited

# Volta 4.5" Downlight Trimless Round









Order Number: R4RD2L-S827-BK



Specifications Features Line Drawing Components Accessories

# **Specifications**

W-

60°

#### **COLOR TEMP &** 15W / 23W / 34W 15W / 23W / 34W MODEL BEAM **FINISH** CRI **LUMENS CBCP** 827 - 2700K - 85 R4RD2L S - 15° BK - Black 655 / 973 / 1375 5330 / 7922 / 11188 830 - 3000K - 85 N -CB - Copper 25° **Bronze**

F - 45° 835 - 3500K - 85 HZ - Haze

WT - White

# 

Where to Buy

**Available Finishes:** 





840 - 4000K - 85